

## RAYTECH RFID-SERIES RMBA-915L-D10

### 1. Features

- High gain
- Wide bandwidth
- Low cost

### 2. Application

RFID base Station




### 3. Specifications


Part Number	Operating Frequency MHz	Peak Gain dBi	VSWR In BW	Impedance Ohm	Dimension LXWXH (mm <sup>3</sup> )
<b>RMBA-915L-D10</b>	860~960	10.0	< 2.0	50	605X154X49
	Operating Temperature Range: -40 ~50 °C Storage Temperature Range: -40 ~50 °C Power Capacity: 500 W max N (F) connector				

Polarization	3dB bandwidth (horizontal)	3dB bandwidth (vertical)	Front to back ratio (dB)	Weight (Kg)
Vertical	110 degree	30 degree	28	5

#### 4. Typical Radiation Pattern

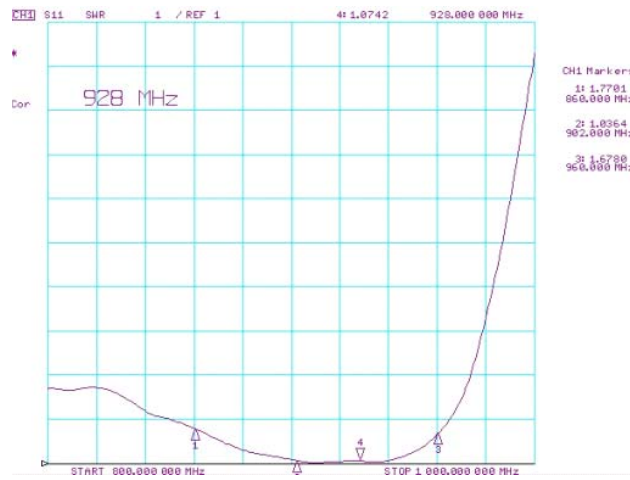

VSWR vs. Frequency

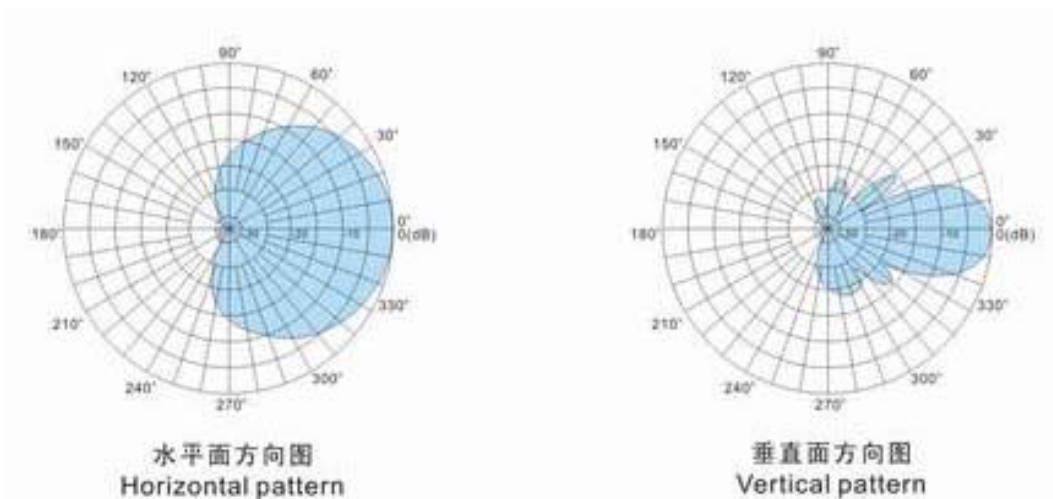

#### 5. Contact Information

磊德科技(深圳)有限公司

地址: 深圳市南山区科技园北区松坪山新西路 5 号银河风云大厦 502 (518057)

电话: 86-755-86137100

传真: 86-755-86168422

RAYTECH (SHENZHEN) CO., LTD.

Add: Unit2, 5th floor, galaxywind mansion, No.5 north district of High-tech industrial park, Shenzhen, China(518057)

Tel: 86-755-86137100

Fax: 86-755-86168422

E-mail: [info@raytechgroup.com](mailto:info@raytechgroup.com)